

7

11.10

0.24

0.6

1.14

1.3

1.35

1.4

1.5

1.55

1.6

1.65

1.7

1.75


1.8

1.85

1.9


replace rotten wood
door with half glazed
UPVC to match


velux rooflight

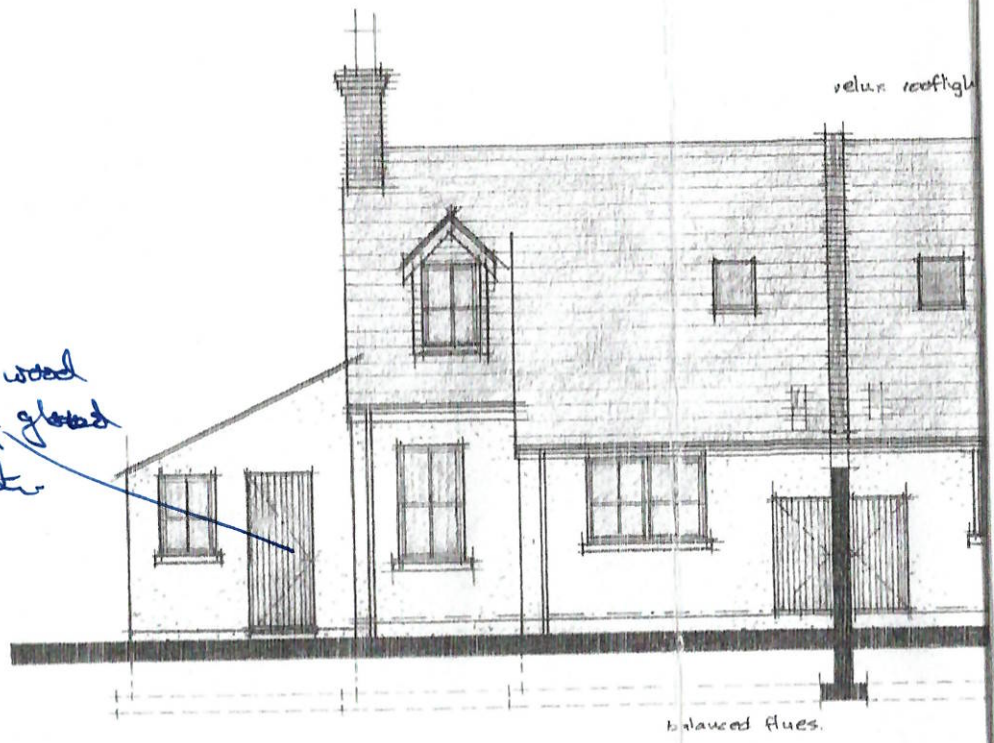

SOUTH ELEVATION.
scale 1:100

construction:-
1. be blockwork construction,
2. bed hardcore backfill. provide
3. tight access cover, in conc slab.

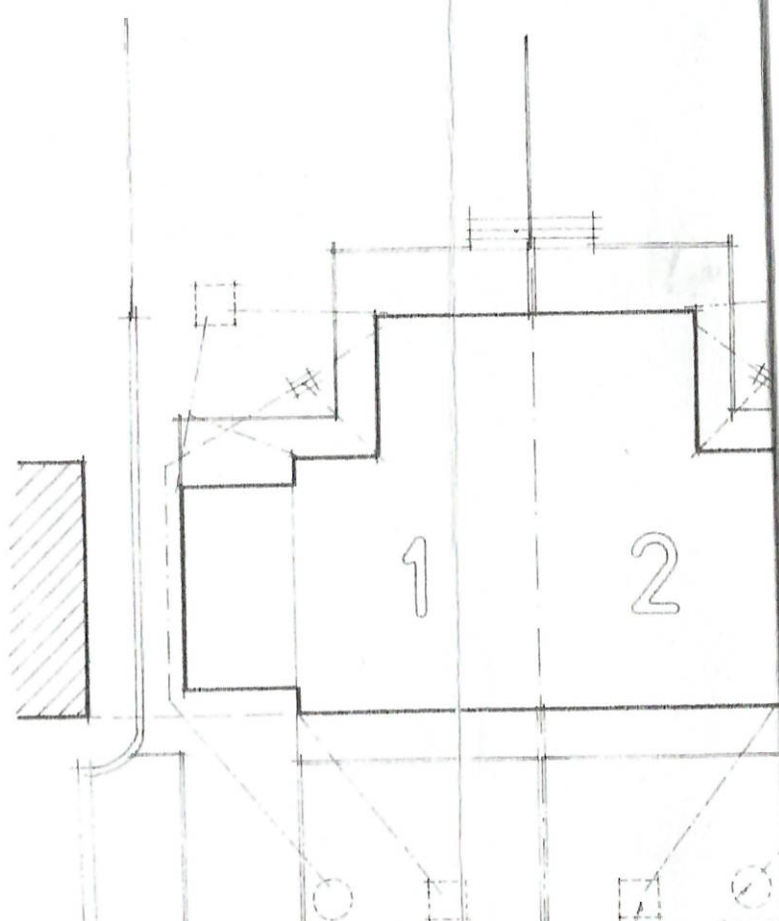

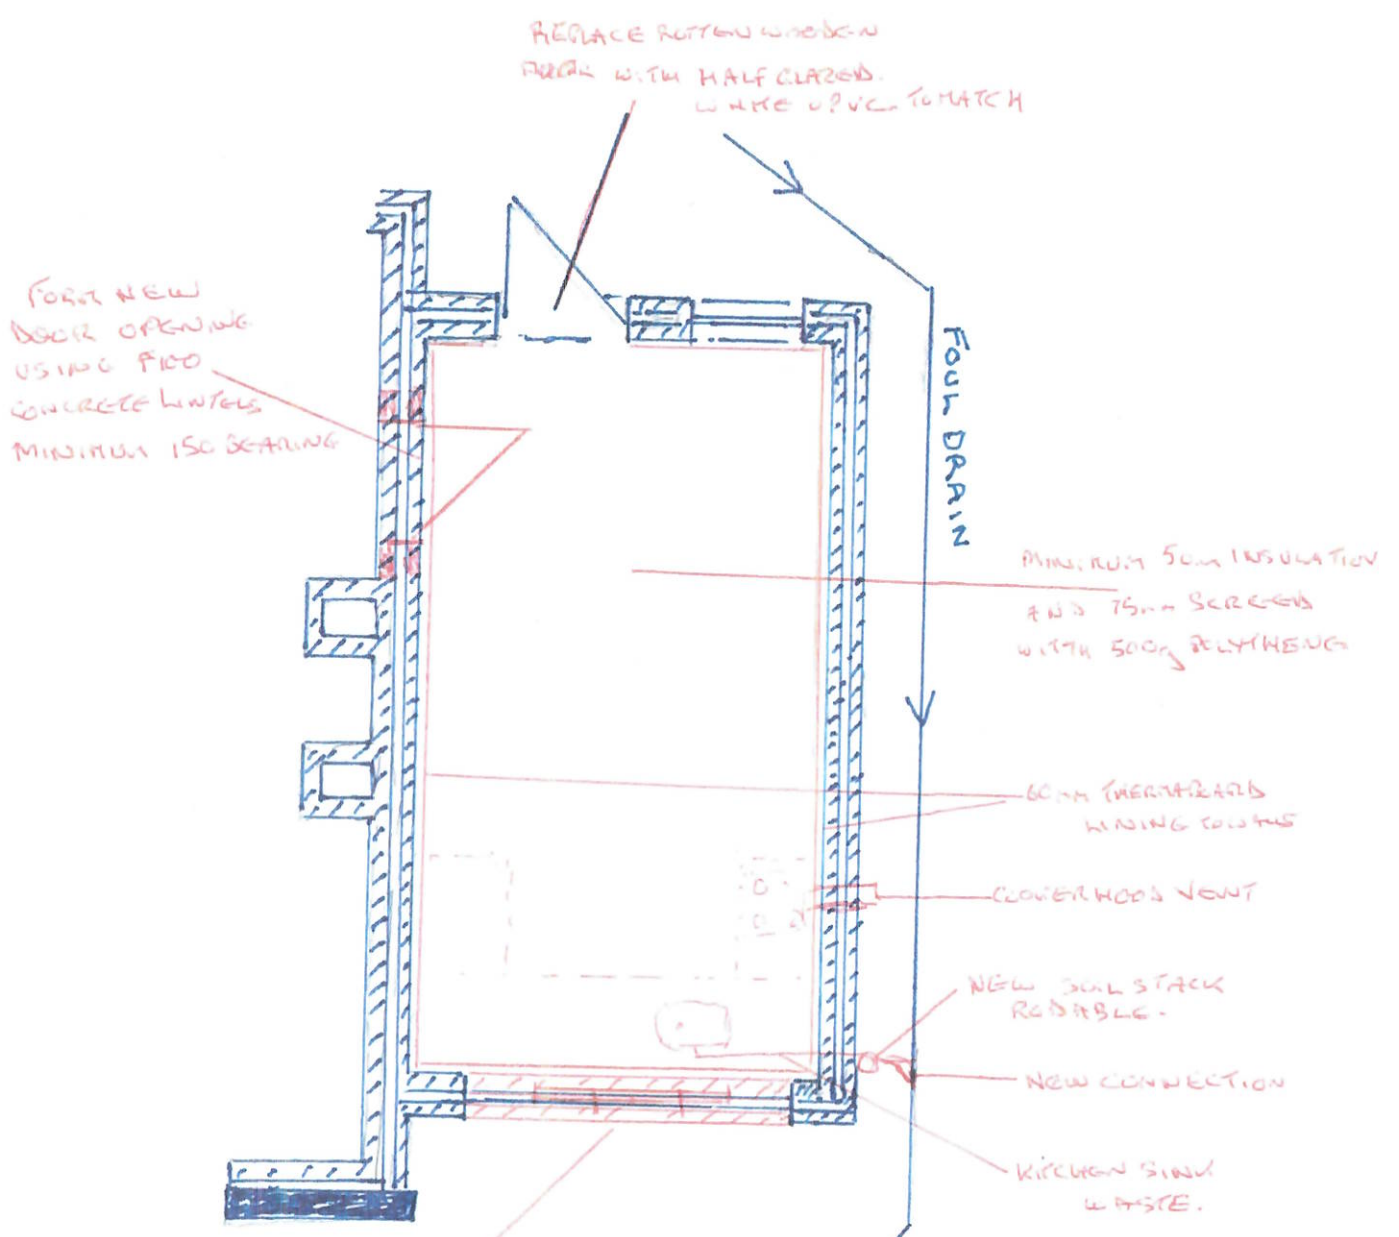

FORM NEW DOOR OPENING USING F100 CONCRETE LINTELS MINIMUM 150 SEATING

REPLACE ROTTEN WOODEN DOOR WITH HALF GLAZED WHITE UPVC TO MATCH

FOUL DRAIN

MINIMUM 50mm INSULATION AND 75mm SCREENS WITH 500gms POLYTHENE

60mm THERMOPLASTIC LINING COLTMS

COVER HOOD VENT

NEW SEAL STACK ROOFABLE -

NEW CONNECTION

KITCHEN SINK WASTE.

250mm BLOCK CAVITY TO MATCH WITH 1350mm x 900mm NEW WINDOW - ABOVE EXISTING LINTEL - TWO OPENING SASHES ONE PANHEAT.

CONVERT EXISTING GARAGE TO KITCHEN/DINING